


## Immersion RTD with lead wire



### PS Type

Technic view

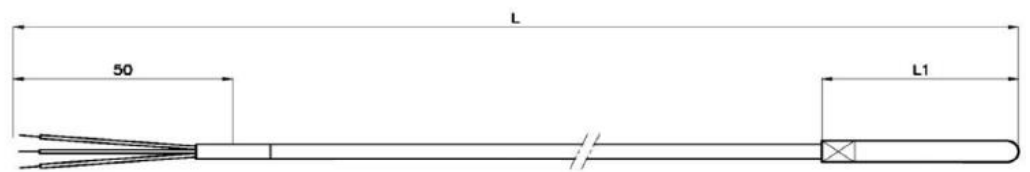

<b>Temperature range</b>	-100°C to +500°C
<b>Sensing element</b>	PT100 / PT500 / PT1000 1x2, 1x3, 1x4, 2x2, 2x3 or 2x4 wires Thermistor possible
<b>Accuracy</b>	Class A, B, 1/3DIN, 1/5DIN, 1/10DIN or AMS
<b>Standard</b>	EN 60751
<b>Dimensions</b>	Protector Material : 304L or 316L. Other on demand Protector Diameter : 3 mm to 8 mm Protector Length (L1) : 50 or 100 mm. Other on demand Cable Length (L) : Other on demand
<b>Cable Type</b>	Soft or Rigid with 2, 3, 4 or 6 wires. Section on demand
<b>Matériau</b>	PVC, Teflon, Silicone, Glass Silk. With or without shielding. Other on demand PVC, Teflon, Silicone, Glass Silk, Metal Braid. Other on demand
<b>Crimping</b>	Standard Annular Double annular
<b>Extension</b>	No
<b>Connection</b>	Wire
<b>Mechanical interface</b>	No
<b>Application Features</b>	ATEX