


Cable type RTD sensor with mineral insulation



PSMSC type

Technic view

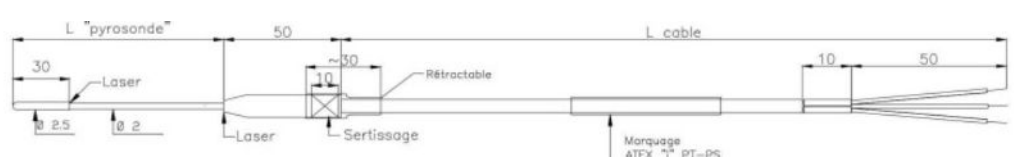

Température range	-100°C to +500°C
Sensing element	PT100 / PT500 / PT1000 Single RTD : 1x2 wires, 1x3 wires or 1x4 wires. Duplex RTD : 2x2 wires or 2x3 wires Thermistor possible
Accuracy	Class A, B, 1/3DIN, 1/5DIN, 1/10DIN or AMS
Standard	EN 60751
Dimensions	Tube Diameter : 1,6 to 6 mm. Other on demand Tube Length (L "pyrosonde") : On demand
Extension length (L cable)	2, 3, 4 or 6 fils. Section on demand
Matériau	Tube : 304L, 316L Extension material : Wire with PVC, Teflon, Silicone, Shielding
Mechanical interface	Sliding fitting Welded fitting Adjustable flange
Application/Features	ATEX